

TX7004

Intelligent Addressable Fire Alarm Control Panel



EN54-2/4
1330h-(cl-4)



Features and Benefits

- Certified EN54-2:1997 + A1:2006, EN54-4:1997 + A1:2002 + A2:2006
- LPCB Approved
- Using advance microprocessor technology with Large memory capacity
- Enhance user interface combining LCD Touch screen and keypad access
- Support real time visual algorithm
- Enhance false alarm prevention
- Keypad and PC programming
- Built-in Multiple interface protocol such as USB/Ethernet/CanBus/ Serial/RS485 (Available only in TX7004/4 Panel)
- Support Loop Powered devices for extra saving on cable cost
- Built-In Printer and 160 LED Zones Indicators

Commissioning Advantages and Capacity

- Auto Enrolling of Devices
- Loop Mapping with color coding status
- Monitor device mismatch and dual address conflict
- Command Builder to create requirements for fire event scenario
- With Loop protection against power surge
- One-man test with On/Off sounder Programming Protection
- Maximum 4 loop in network application built-in 4-in-1 Communication card
- Support 254 Devices per loop
- Maximum 6 loop in standalone basis (1,524 ideal)
- Network up to 512 Node
- Programmable Capacity
- Zones up to 3000
- Sounders Groups 1-1000
- Modules Groups 1001- 2000
- Built-in 160 LED Zones Indicator


Overview

The TX7004 comprise of a range of analogue addressable, microprocessor-based fire alarm control equipment to offer flexibility in both design and operation. The System is modular concept for easy tailoring of system design, to meet the full requirements of the project. The TX7004 Intelligent Fire Alarm Control Panel is designed and manufactured to meet the requirement of BS EN54 Part 2&4.

The TX7004 is designed to provide early warning fire detection, to quickly identify the location of fire and provide user definable text informing the occupants of the building of potential smoke spread. Simultaneously, the TX7004 will alert and evacuate the occupants, and control all necessary auxiliary command functions such as elevator control, air handling shut down, gas shut off & damper control, as per the cause and effects requirements configured though Command Builder Set-up.



Technical Specification

Listed	LPCB / CE-CPR
Certified	EN54-2:1997 + A1:2006, EN54-4:1997 + A1:2002 + A2:2006

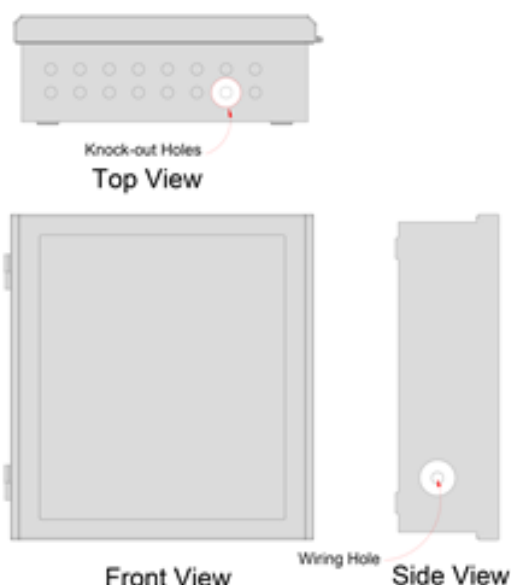


Physical	
Material / Color	Flat sheet Metal / with outer glass door, orange stripe
Dimension L x W x H	530 mm x 490 mm x 135 mm
Weight	16.70 Kg
Humidity	0 to 95% Relative Humidity, Noncondensing

Control Panel	
Input Voltage	240VAC +10%-15%, 50/60Hz
Input Current Consumption	1 A
PSU Output to CIE	24.5 to 28.5 VDC
Batteries	2 x 12V / 24AH
Memory [Non-Volatile]	1000 Fire Events, 10,000 General Event
Zones	3,000 programmable
Groups	3,000 programmable
Programmable Relays	4 circuits: Normally Open/Close
Programmable Input	1 Circuit: Power limited 24Vdc (for future use)
Programmable Auxiliary Power	19 to 28 VDC (Note: Current Limited)
Fixed Outputs (FPE/Sounder)	2 Circuits: 18 to 28 VDC (Note: Current Limited)
Indicator	24 LED Status/ 160 Zone Indicators
Display	7" TFT Touch Screen
Keypad	5 Brigade buttons and Programming Keypad

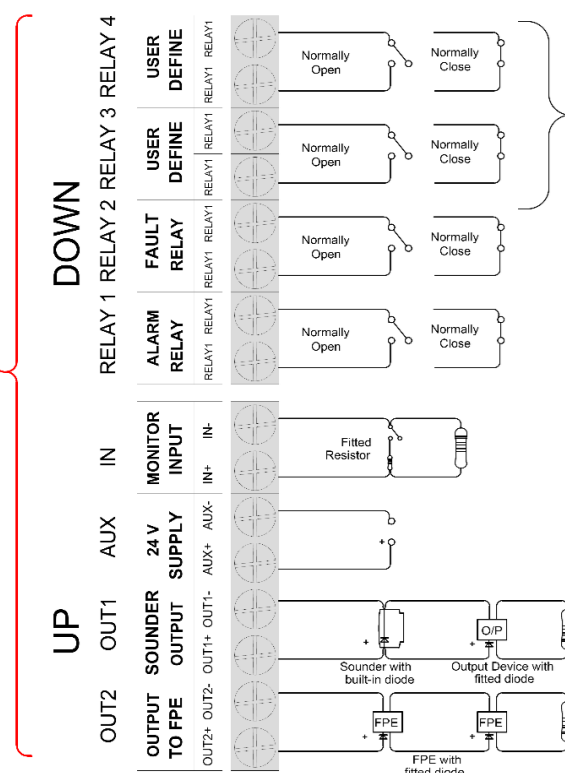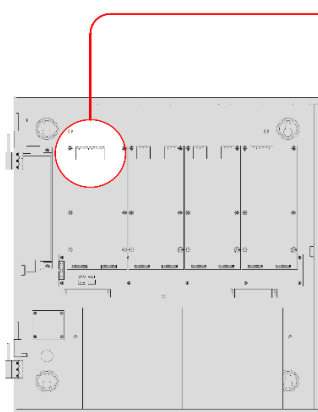

Technical Specification

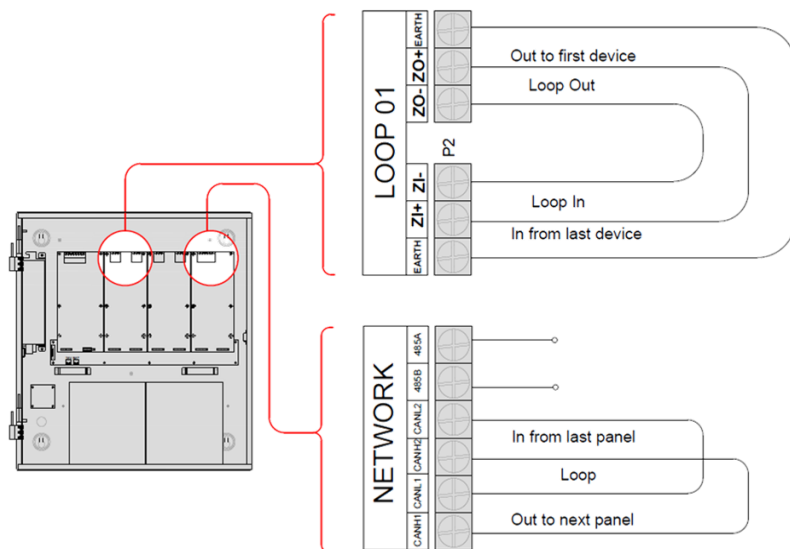

Loop Specifications

Protocol/Addressing	T&A, Value ranges from 1 to 254
No. of Loop	4 Loop/ 254 per loop
Protection	Built-in 4kV Surge protection
Power rating	16 to 24Vdc / 500mA
16 to 24Vdc	1.2Km Max Length/2 x 1.5mm ² solid core Fire resistance

Networking and Interfaces

Panel to panel communication	Can Bus [loop]
Number of Panels	512 units
Interface Port	USB, RS485 Serial, RS232 Serial, Ethernet

Ordering Information:

TX7004/1	1 Loop LPCB Approved .7" LCD display touch screen, fitted with 1x Single Loop Card, basic configuration up to 254 Addressable Devices, expandable to 6-loop by adding loop card. NO Glass door and Optional Printer. Optional 4-in-1 Communication Card
TX7004/2	2 Loop LPCB Approved .7" LCD display touch screen, fitted with 1x Dual Loop Card, basic configuration up to 508 Addressable Devices, expandable to 6-loop by adding loop card. Built-in Glass Door and Printer. Optional 4-in-1 Communication Card
TX7004	4 Loop LPCB Approved .7" LCD display touch screen, fitted with 2x Dual Loop Card, basic configuration up to 1016 Addressable Devices, expandable to 6-loop by adding loop card. Built-in Glass Door and Printer. Built-in 4-in-1 Communication Card